

The configuration of the folding door should consider several factors that include the primary passage way, the aesthetics, but also the ease of use as well as the longevity of the doors.

Sizing




We recommend a panel size between 650 mm - 900mm

We recommend a maximum height of 3000 mm

The weight of one panel should be kept < 60kg


Stacking



The doors can be configured to be either outward opening or inward opening.

Considering the bottom track setup we recommend outward opening for overall water tightness performance.


Layout




The configuration chart on the right hand side shows the possible panel setups.

For ease of operation we recommend to rather split the door in the middle than stacking all panels on one side. For example 6-3-3 will be significantly more convenient and robust than 7-7-0.


Configuration 3-3-0

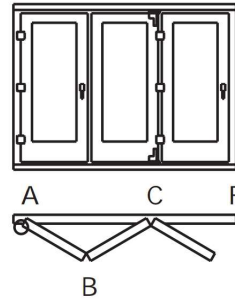


Configuration 6-5-1

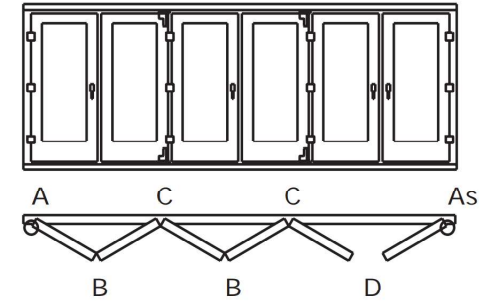


Configuration 4-4-0

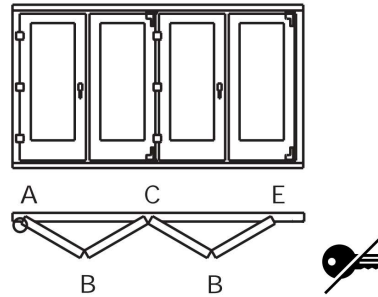


Configuration 6-3-3

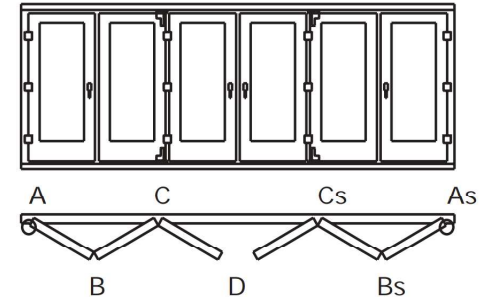


Configuration 4-3-1

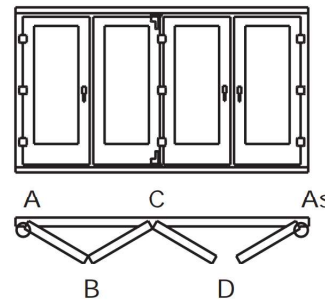

Configuration 7-7-0

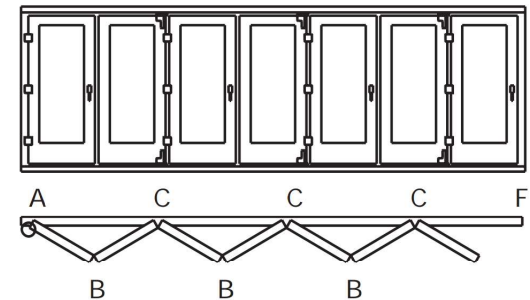

Configuration 5-5-0

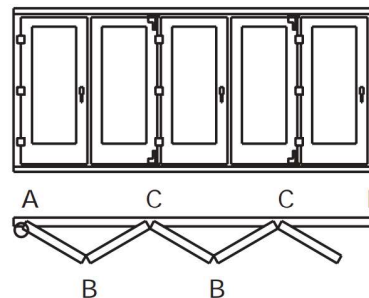

Configuration 8-7-1

